


Längswölbung max. 3 mm/m (max. 15 mm / Stab)

Verdrehung max. 2 mm/m

Kantenradien 2 ± 0.5mm

Profil <b>SteelWall M156</b>						Massstab/scale: 1 : 1		
Stahlgüte/ steelgrade	S355					Bearb./sign.	Datum	Name
Gewicht/weight	16.2 kg/m					gepr.	03-08-2022	Birkenmaier
Fläche/cross sectional area	20.6 cm <sup>2</sup>	Zust.	Aenderung	Datum	Name	<b>SteelWall ISH GmbH</b>		
Umfang/ perimeter	35.7 cm	Profil Nr. <b>SteelWall M156</b>						

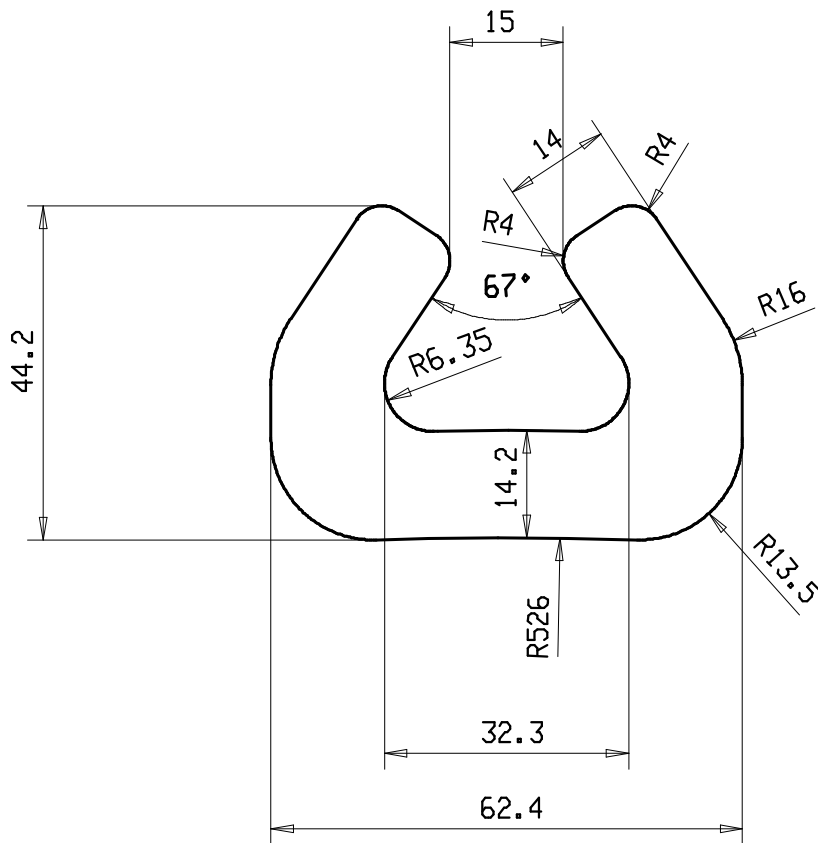

Längswölbung max. 3 mm/m (max. 15 mm / Stab)

Verdrehung max. 2 mm/m

Kantenradien  $2 \pm 0.5$ mm

Profil <b>F24-14</b>					Massstab/scale: 1 : 1		
Stahlgüte/ steelgrade	<b>S355</b>				Bearb./sign.	Datum	Name
Gewicht/weight	<b>13.4 kg/m</b>				gepr.	03-08-2022	Birkenmaier
Fläche/cross sectional area	<b>17.0 cm<sup>2</sup></b>	Zust.	Aenderung	Datum	Name	<b>SteelWall ISH GmbH</b>	
Umfang/ perimeter	<b>25.1 cm</b>	Profil Nr. <b>F24-14</b>					