


Längswölbung max. 3 mm/m (max. 15 mm / Stab)

Verdrehung max. 2 mm/m

Kantenradien  $2 \pm 0.5$  mm

Profil <b>F24-14</b>					Massstab/scale: 1 : 1		
Stahlgüte/ steelgrade	<b>S355</b>					Datum	Name
Gewicht/weight	13.4 kg/m					Bearb./sign.	Birkenmaier
Fläche/cross sectional area	17.0 cm <sup>2</sup>					gepr.	
Umfang/ perimeter	25.1 cm	Zust.	Aenderung	Datum	Name		
		Profil Nr. <b>F24-14</b>					

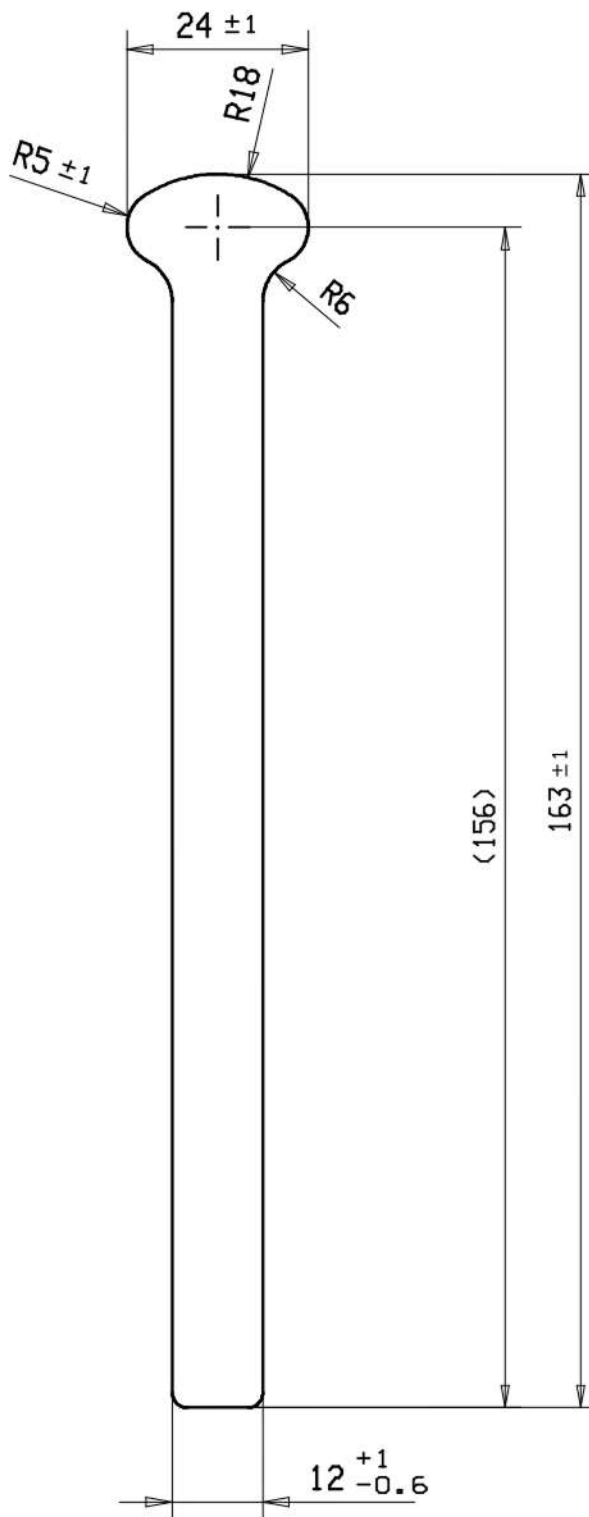

Längswölbung max. 3 mm/m (max. 15 mm / Stab)

Verdrehung max. 2 mm/m

Kantenradien 2 ± 0.5mm

Profil <b>SteelWall M156</b>					Massstab/scale: <b>1 : 1</b>		
Stahlgüte/ steelgrade	<b>S355</b>					Datum	Name
Gewicht/weight	<b>16.2 kg/m</b>					Bearb./sign.	<b>03-08-2022</b>
Fläche/cross sectional area	<b>20.6 cm<sup>2</sup></b>					gepr.	
Umfang/ perimeter	<b>35.7 cm</b>	Zust.	Aenderung	Datum	Name		
		Profil Nr. <b>SteelWall M156</b>					